



FIRE & SAFETY

EQUIPMENT COMPANY

June 2025



STORM SURGE



WWW.FIREANDSAFETY.COM



TNT RESCUE
BUILT TO RESCUE



THE STORM IS HERE



STORM SURGE



WHY BUY TNT?

- 1 100% MANUFACTURED IN THE USA.
- 2 THE ONLY "FOREVER WARRANTY".
- 3 LOWEST COST OF OWNERSHIP.
- 4 MILWAUKEE, DEWALT, OR MAKITA BATTERIES.
- 5 USES A DC MOTOR MAKING IT THE MOST EFFICIENT.
- 6 TNT IS A FAMILY-OWNED AND OPERATED



100% Made in the USA,
built to last.



The only tool with a FOREVER Warranty.
Parts & Labor FREE.



The ONLY tool with
3 options.



TNT RESCUE
BUILT TO RESCUE



**2 BATTERIES
AND
1 CHARGER**



FREE!



****Choose between
Milwaukee, Dewalt, or
Makita.****



WITH EVERY TOOL!



FIRE & SAFETY
EQUIPMENT COMPANY



NOW OFFERING VEHICLE EXTRICATION CLASSES!!



Learn from state adjunct instructors,
who teach to the standard.



We provide can provide the equipment.



Meet your state standards.



Offering Basic & Advanced Vehicle
Extrication Classes (single & multiday)

**SCAN TO REQUEST
TRAINING AND PRICING**



**(434) 993-2425
TNT@FIREANDSAFETY.COM
WWW.FIREANDSAFETY.COM**

INDEX

WELCOME	PG 1
FOREVER WARRANTY	PG 2
CUTTERS	PG 3-5
COMBI-CUTTER/SPREADER	PG 6-7
SPREADERS	PG 8-10
RAMS	PG 11-13
ACCESSORIES	PG 14
ISO	PG 15
TNT SERVICE	PG 16
MILWAUKEE ONE-KEY	PG 17-18



Welcome to TNT Rescue Systems, Inc, the premier manufacturer of Powered Hydraulic Rescue Tools. The employees and distributors are delighted with your interest in our products and look forward to a long and mutually beneficial relationship.

Blanton & Company began as an OEM manufacturer of Industrial hydraulic pumps. Entry into the rescue tool world came by way of one of our early customers, with the **Blanton design of the first true 2 tool simultaneous operation pump**. Owner and President Tom Blanton, noted a lack of customer service in the rescue tool market, creating the initial vision of what would become TNT Rescue Systems, Inc.

TNT Rescue Systems Inc's vision is simple: design, build, and distribute the highest quality hydraulic rescue tools, **provide a Forever Warranty** and support the customer with the highest level of service. The dedication to service is shown everyday by the family of TNT Rescue Systems, Inc. From employees at the factory, management, or our dealers we have current and retired firefighters throughout our organization and fully understand the expectations of tool performance on the street.

TNT Rescue Systems, Inc. understands the service you need from you rescue tools and your tool manufacturer. **Dedication to our customers continues with our Forever Warranty. Our warranty is the most comprehensive in the industry, providing coverage for our products.** Whether you're a dealer or end user we are committed to providing you with exceptional customer service. Our customer-focused method of doing business has been the standard at TNT Rescue Systems Inc, (Blanton & Company) since its start in 1986.

TNT Rescue Systems, Inc. is 100% owned and operated with our only facility solely located in Ashippun, Wisconsin.

To that end, TNT Rescue Systems, Inc. is a ISO 9001:2015 registered company and builds tools to exceed the minimum performance standard of NFPA 1936 & EN 13204





TNT RESCUE SYSTEMS STORM-SURGE SERIES BATTERY-OPERATED EXTRICATION TOOLS ARE **POWERED BY THE MILWAUKEE M18, DEWALT® 20V, OR MAKITA 18V PLATFORMS, MAKING THEM THE LONGEST-RUNNING PORTABLE RESCUE TOOLS ON THE MARKET. THE END-USER BENEFITS FROM THE PRICE AND AVAILABILITY USING THESE OEM NON-PROPRIETARY BATTERIES.**

THE TOOLS FEATURE AN ALL-NEW WELL BALANCED COMPACT ALUMINIUM DESIGN, WITH **TOOL SPEEDS THAT ARE UNMATCHED UNDER BOTH LOADED AND UNLOADED CONDITIONS WITH NO DEGRADATION IN POWER.** WITH THIS NEW DESIGN, IT MAKES IT POSSIBLE TO DO RELIEF CUTS IN TIGHT POSITIONS WHERE OTHER MANUFACTURERS CANT. THE BATTERY TERMINAL IS LOCATED ON THE TOP OF THE TOOL BETWEEN THE CARRY HANDLE AND CONTROL VALVE, PROVIDING BETTER PROTECTION AND SAFETY.

CONTACT FIRE & SAFETY EQUIPMENT COMPANY FOR MORE INFORMATION OR THEIR WEBSITE.

WWW.FIREANDSAFETY.COM/OUR-BRANDS/TNT-RESCUE



ESLC-29-18V

LENGTH 32.99 IN

HEIGHT 11.69 IN

WIDTH 10.5 IN

WEIGHT EXCL. BATTERY 51.40 LBS

WEIGHT INCL. BATTERY (MILWAUKEE M18)
53.75 LBS

MAX. BLADE OPENING 8.00 IN

MAX. CUT REACH 5.08 IN

CERTIFIED TO NFPA 1936-2020 YES

NFPA CUT TEST A8, B9, C9, D9, E9, F5

IP RATING 54



ESLC-29-20V 9AH

WEIGHT (INCL. BATTERY)
54.60 LBS



ESLC-29-18V LXT-6AH

WEIGHT (INCL. BATTERY)
52.90 LBS



STORM SURGE

ESLC-30-18V

LENGTH 31.50 IN
 HEIGHT 11.69 IN
 WIDTH 10.5 IN
 WEIGHT EXCL. BATTERY 50.70 LBS
 WEIGHT INCL. BATTERY (MILWAUKEE M18)
 53.10 LBS
 MAX. BLADE OPENING 8.25 IN
 MAX. CUT REACH 5.25 IN
 CERTIFIED TO NFPA 1936-2020 YES
 NFPA CUT TEST A8, B9, C9, D9, E9, F5
 IP RATING 54



ESLC-30 20V-9AH

WEIGHT (INCL. BATTERY)
 53.90 LBS



ESLC-30 18V LXT-6AH

WEIGHT (INCL. BATTERY)
 52.20 LBS



STORM SURGE

EBFC-320-18V



LENGTH 35.81 IN

HEIGHT 11.81 IN

WIDTH 10.5 IN

WEIGHT EXCL. BATTERY 61.50LBS

WEIGHT INCL. BATTERY (MILWAUKEE M18)
63.90 LBS

MAX. BLADE OPENING 8.60 IN

MAX. CUT REACH 5.55 IN

CERTIFIED TO NFPA 1936-2020 YES

NFPA CUT TEST A9, B9, C9, D9, E9, F6

IP RATING 54




EBFC-320 20V-9AH

WEIGHT (INCL. BATTERY)
64.75 LBS



EBFC-320 18V LXT-6AH

WEIGHT (INCL. BATTERY)
63.05 LBS



STORM SURGE

ESLCC-24-18V



LENGTH 31.12 IN

HEIGHT 11.74 IN

WIDTH 10.50 IN

WEIGHT EXCL. BATTERY 39.80LBS

WEIGHT INCL. BATTERY (MILWAUKEE M18)
42.20 LBS

MAX. BLADE OPENING 9.12 IN

MAX. CUT REACH 3 IN

MAX. SPREAD DIST. 12.00 IN

MAX. SPREAD FORCE RANGE

11,880 - 121,000 LBF

CERTIFIED TO NFPA 1936-2020 YES

NFPA CUT TEST A6, B5, C7, D7, E6

IP RATING 54



ESLCC-24 20V-9AH

WEIGHT (INCL. BATTERY)
43.00 LBS



ESLCC-24 18V LXT-6AH

WEIGHT (INCL. BATTERY)
41.30 LBS



STORM SURGE



EBFCC-28-18V



LENGTH 36.21 IN

HEIGHT 11.74 IN

WIDTH 10.50 IN

WEIGHT EXCL. BATTERY 52.75LBS

WEIGHT INCL. BATTERY (MILWAUKEE M18)
55.08 LBS

MAX. BLADE OPENING 10.12 IN

MAX. CUT REACH 5.55 IN

MAX. SPREAD DIST. 17.00 IN

MAX. SPREAD FORCE RANGE
286,000 LBF

CERTIFIED TO NFPA 1936-2020 YES

NFPA CUT TEST A8, B7, C8, D8, E9, F5

IP RATING 54



EBFCC-28 20V-9AH

WEIGHT (INCL. BATTERY)
55.95 LBS



EBFCC-28 18V LXT-6AH

WEIGHT (INCL. BATTERY)
54.25 LBS



STORM SURGE

ES100-24-18V



LENGTH 32.43 IN

HEIGHT 11.15 IN

WIDTH 13.58 IN

WEIGHT EXCL. BATTERY 46.85 LBS

INCL. BATTERY (MILWAUKEE M18)
49.20 LBS

MAX. SPREAD DISTANCE 23.50 IN

MAX. SPREAD FORCE RANGE

64,476 - 242,368 LBF

MAX. PULL DIST. 14.25 IN

MAX. PULL FORCE 14,368 LBF

CERTIFIED TO NFPA 1936-2020 YES

IP RATING 54



ES100-24 20V-9AH

WEIGHT (INCL. BATTERY)
50.05 LBS



ES100-24 18V LXT-6AH

WEIGHT (INCL. BATTERY)
48.35 LBS



STORM SURGE



ES100-28-18V



LENGTH 34.80 IN

HEIGHT 11.15 IN

WIDTH 13.58 IN

WEIGHT

EXCL. BATTERY 48.20 LBS

INCL. BATTERY (MILWAUKEE M18)
50.55 LBS

MAX. SPREAD DISTANCE 27.50 IN

MAX. SPREAD FORCE RANGE

56,128 - 228,126 LBF

MAX. PULL DISTANCE 18.25 IN

MAX. PULL FORCE 11,168 LBF

CERTIFIED TO NFPA 1936-2020 YES

IP RATING 54



ES100-28 20V-9AH

WEIGHT (INCL. BATTERY)
51.40 LBS



ES100-28 18V LXT-6AH

WEIGHT (INCL. BATTERY)
48.35 LBS



ES100-32-18V



LENGTH 37.17 IN

HEIGHT 11.15 IN

WIDTH 13.58 IN

WEIGHT

EXCL. BATTERY 49.45 LBS

INCL. BATTERY (MILWAUKEE M18)
51.80 LBS

MAX. SPREAD DISTANCE 31.50 IN

MAX. SPREAD FORCE RANGE


50,592 - 201,420 LBF

MAX. PULL DISTANCE 22.25 IN

MAX. PULL FORCE 9,339 LBF

CERTIFIED TO NFPA 1936-2020 YES

IP RATING 54



ES100-28 20V-9AH

WEIGHT (INCL. BATTERY)
52.65 LBS



ES100-28 18V LXT-6AH

WEIGHT (INCL. BATTERY)
50.95 LBS



STORM SURGE




ER-40-18V

CLOSED LENGTH 25.50 IN
EXTENDED LENGTH 41.00 IN
HEIGHT 10.75 IN
WIDTH 8.10 IN
WEIGHT
EXCL. BATTERY 41.25 LBS
INCL. BATTERY (MILWAUKEE M18)
 43.60 LBS
MAX. PUSH FORCE 37,005 LBF
MAX. PULL FORCE 8,293 LBF
CERTIFIED TO NFPA 1936-2020 YES
IP RATING 54



ER-40 20V-9AH

WEIGHT (INCL. BATTERY)
 44.45 LBS



ER-40 18V LXT-6AH

WEIGHT (INCL. BATTERY)
 42.75 LBS



STORM SURGE

ETLS-40-18V

CLOSED LENGTH 21.50 IN
 EXTENDED LENGTH 42.25 IN
 HEIGHT 10.75 IN
 WIDTH 8.10 IN
 WEIGHT
 EXCL. BATTERY 38.75 LBS
 INCL. BATTERY (MILWAUKEE M18)
 41.10 LBS
 1ST STAGE STROKE 12.95 IN
 1ST STAGE MAX. PUSH FORCE 38.067 LBF
 2ND STAGE STROKE 8.70 IN
 2ND STAGE MAX. PUSH FORCE 13.088 LBF
 CERTIFIED TO NFPA 1936-2020 YES
 IP RATING 54



ETLS-40 20V-9AH

WEIGHT (INCL. BATTERY)
 41.95 LBS



ETLS-40 18V LXT-6AH

WEIGHT (INCL. BATTERY)
 40.25 LBS



STORM SURGE





RAM BASE EXTENSION - KIT

6 INCH RAM BASE EXTENSION

ASSEMBLED LENGTH 10.35 IN

MAXIMUM EXTENDED LENGTH

ER-40 WITH EXTENSION 48.75 IN

ETLS-40 WITH EXTENSION 50.00 IN

12 INCH RAM BASE EXTENSION

ASSEMBLED LENGTH 16.35 IN

MAXIMUM EXTENDED LENGTH

ER-40 WITH EXTENSION 54.75 IN

ETLS-40 WITH EXTENSION 56.00 IN

18 INCH RAM BASE EXTENSION

ASSEMBLED LENGTH 22.35 IN

MAXIMUM EXTENDED LENGTH

ER-40 WITH EXTENSION 60.75 IN

ETLS-40 WITH EXTENSION 62.00 IN



R - KIT

XR - KIT

570220 - M18 - 8AH



M18 PACKOUT
6-BAY
RAPID CHARGER

570221 - M18 DUAL
RAPID CHARGER

M18 DUAL BAY
SIMULTANEOUS
SUPER CHARGER



570222 - 20V/60V - 9AH

570223 - DCB118 SINGLE
FAST CHARGER



570225 - 18V - 6AH

570226 - DC18RD DUAL
RAPID CHARGER





ISO 9001-2015

The International for Standardization (ISO) is a network of national standards instituted in 157 countries. Each ISO member is the leading standards organization in its country. These members devise new standards, work to advance them, and team up with the ISO Central Secretariat to guide the technical groups that develop them.

They award certification only after registered, independent auditors review a company's process against strict ISO standards, and verify that the company has met established requirements, in both policy and practice.

TNT Rescue Systems Inc. is certified as an ISO 9001:2015 registered firm. This means you can be sure that TNT Rescue Systems Inc. products are designed and manufactured to the high standards our industry - and the ISO - demands. Certification covers all that we do to enhance customer satisfaction by meeting both customer and regulatory requirements, while continually improving performance.

PERFORMANCE,
QUALITY
AND SERVICE
GUARANTEED!

15






NEED SERVICE, PRICING, OR TRAINING?



CHECK OUT OUR NEW TNT
REQUEST PAGE!



NEED TO UPGRADE YOUR M28 TOOLS TO M18?



CONVERSION/UPGRADE
NOW OFFERED
FOR M28 (STORM 2 TOOLS)




16



CUSTOMIZE. TRACK. MANAGE.

FREE Inventory Management & Tracking System

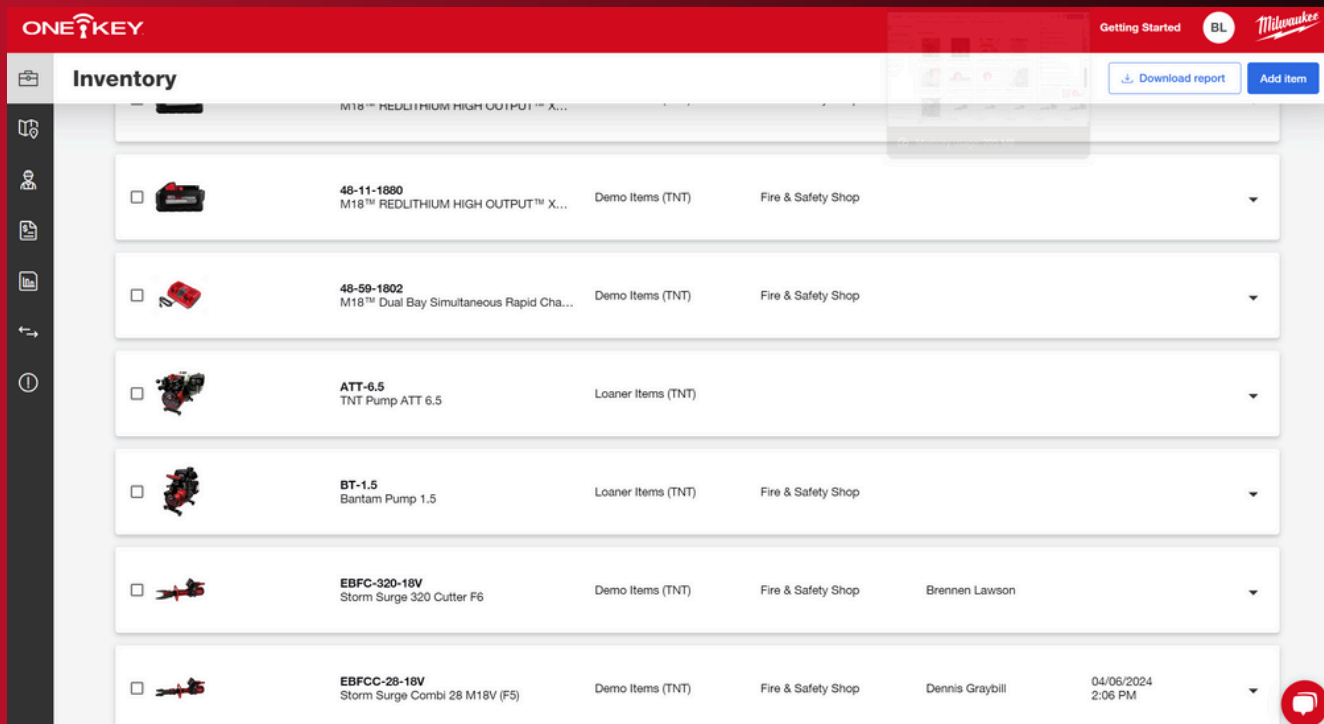

NEWEST FROM MILWAUKEE: DUAL BANK SUPER CHARGER & FORGE M18 BATTERIES!


**35 MIN
SUPERCHARGE
TO 80%**

CHARGE TIME COMPARISON



17

USE TO TRACK YOUR TNT TOOLS & ACCESSORIES!

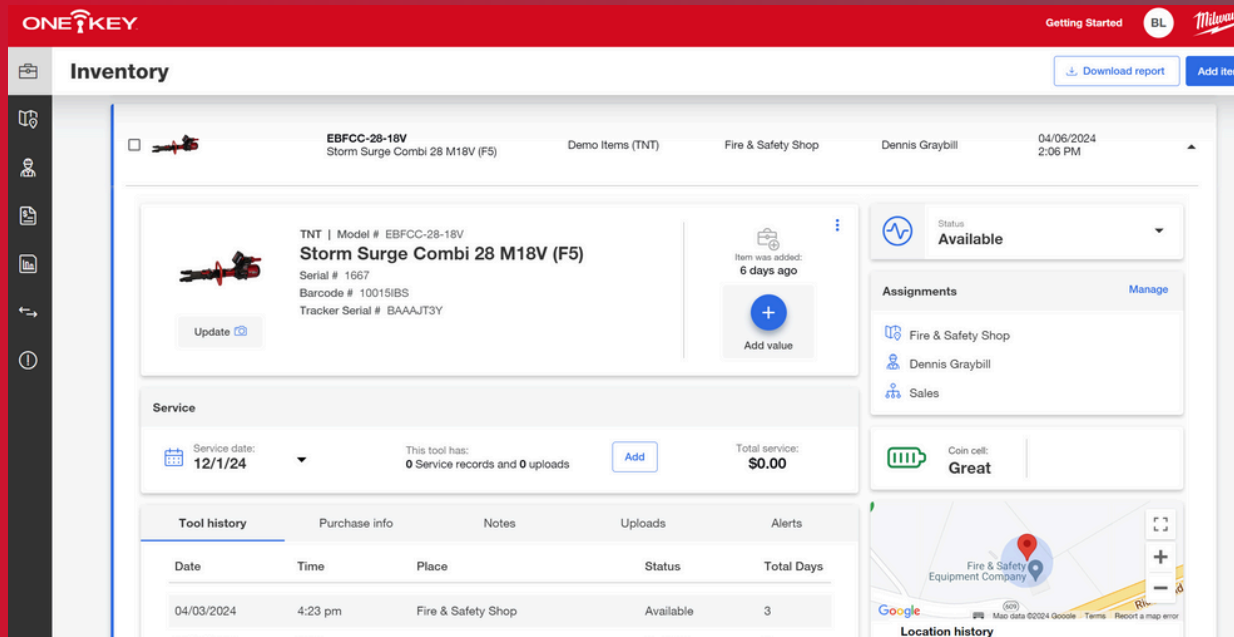


CAN BE SET UP ON DELIVERY.



HIGH-SPEED COOLING LESS DOWNTIME.

CHARGE HOT BATTERIES FASTER TO 100%

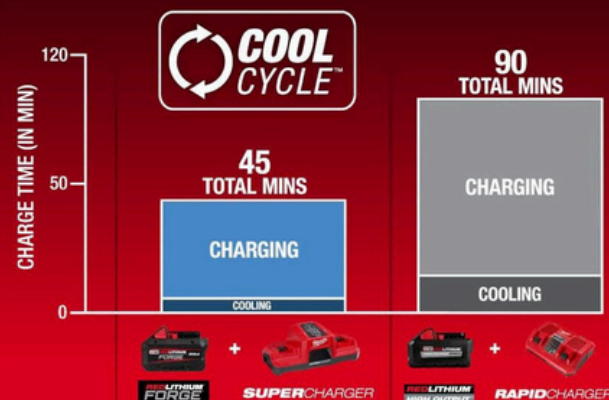

18



FOR MORE DETAILED INFORMATION OR TO
SCHEDULE A DEMO PLEASE REACH OUT:

WWW.FIREANDSAFETY.COM



TNT@FIREANDSAFETY.COM



June 2025