



FIRE & SAFETY
EQUIPMENT COMPANY



**STORM
SURGE**



WWW.FIREANDSAFETY.COM

June 2025



WHY BUY TNT?

1

100% MANUFACTURED IN THE USA.

TNT's flag isn't just an ornament. Manufacturing 100% in the USA!

2

THE ONLY "FOREVER WARRANTY".

Others claim to have a "Lifetime Warranty", which they pro-rate. There are never questions on what is/isn't covered. Parts & labor covered FOREVER!

3

EASIER TO MAINTAIN / LOWEST COST OF OWNERSHIP.

TNT's battery-operated rescue tools only require an oil change after ten years of service.

4

MILWAUKEE, DEWALT, OR MAKITA BATTERIES.

The only tool in the world to offer 3 choices of batteries. TNT uses non-proprietary batteries. Benefits are PRICE & AVAILABILITY. TNT's battery costs are never hidden.

5

USES A DC MOTOR MAKING IT THE MOST EFFICIENT.

Increases battery operating time, and allows for a smaller circuit board, thus running cooler and outperforming any competitors which require a DC/AC inverter.

6

TNT IS A FAMILY-OWNED AND OPERATED BUSINESS.

No corporate red tape involved which means any promises above are kept!





TNT RESCUE
BUILT TO RESCUE



**2 BATTERIES
AND
1 CHARGER**



FREE!



****Choose between
Milwaukee, Dewalt, or
Makita.****



WITH EVERY TOOL!



**LOCALLY OWNED
AND OPERATED**

FIRE & SAFETY
EQUIPMENT COMPANY



INDEX

WELCOME	PG 1
FOREVER WARRANTY	PG 2
CUTTERS	PG 3-5
COMBI-CUTTER/SPREADER	PG 6-7
SPREADERS	PG 8-10
RAMS	PG 11-13
ACCESSORIES	PG 14
ISO	PG 15
MILWAUKEE ONE-KEY	PG 16-17





Welcome to TNT Rescue Systems, Inc, the premier manufacturer of Powered Hydraulic Rescue Tools. The employees and distributors are delighted with your interest in our products and look forward to a long and mutually beneficial relationship.

Blanton & Company began as an OEM manufacturer of Industrial hydraulic pumps. Entry into the rescue tool world came by way of one of our early customers, with the **Blanton design of the first true 2 tool simultaneous operation pump**. Owner and President Tom Blanton, noted a lack of customer service in the rescue tool market, creating the initial vision of what would become TNT Rescue Systems, Inc.

TNT Rescue Systems Inc's vision is simple: design, build, and distribute the highest quality hydraulic rescue tools, **provide a Forever Warranty** and support the customer with the highest level of service. The dedication to service is shown everyday by the family of TNT Rescue Systems, Inc. From employees at the factory, management, or our dealers we have current and retired firefighters throughout our organization and fully understand the expectations of tool performance on the street.

TNT Rescue Systems, Inc. understands the service you need from you rescue tools and your tool manufacturer. **Dedication to our customers continues with our Forever Warranty. Our warranty is the most comprehensive in the industry, providing coverage for our products.** Whether you're a dealer or end user we are committed to providing you with exceptional customer service. Our customer-focused method of doing business has been the standard at TNT Rescue Systems Inc, (Blanton & Company) since its start in 1986.

TNT Rescue Systems, Inc. is 100% owned and operated with our only facility solely located in Ashippun, Wisconsin.

To that end, TNT Rescue Systems, Inc. is a ISO 9001:2015 registered company and builds tools to exceed the minimum performance standard of NFPA 1936 & EN 13204





TNT RESCUE SYSTEMS STORM-SURGE SERIES BATTERY-OPERATED EXTRICATION TOOLS ARE **POWERED BY THE MILWAUKEE M18, DEWALT® 20V, OR MAKITA 18V PLATFORMS, MAKING THEM THE LONGEST-RUNNING PORTABLE RESCUE TOOLS ON THE MARKET. THE END-USER BENEFITS FROM THE PRICE AND AVAILABILITY USING THESE OEM NON-PROPRIETARY BATTERIES.**

THE TOOLS FEATURE AN ALL-NEW WELL BALANCED COMPACT ALUMINIUM DESIGN, WITH **TOOL SPEEDS THAT ARE UNMATCHED UNDER BOTH LOADED AND UNLOADED CONDITIONS WITH NO DEGRADATION IN POWER.** WITH THIS NEW DESIGN, IT MAKES IT POSSIBLE TO DO RELIEF CUTS IN TIGHT POSITIONS WHERE OTHER MANUFACTURERS CANT. THE BATTERY TERMINAL IS LOCATED ON THE TOP OF THE TOOL BETWEEN THE CARRY HANDLE AND CONTROL VALVE, PROVIDING BETTER PROTECTION AND SAFETY.

CONTACT FIRE & SAFETY EQUIPMENT COMPANY FOR MORE INFORMATION OR THEIR WEBSITE.

WWW.FIREANDSAFETY.COM/OUR-BRANDS/TNT-RESCUE



ESLC-29-18V

LENGTH 32.99 IN

HEIGHT 11.69 IN

WIDTH 10.5 IN

WEIGHT EXCL. BATTERY 51.40 LBS

WEIGHT INCL. BATTERY (MILWAUKEE M18)
53.75 LBS

MAX. BLADE OPENING 8.00 IN

MAX. CUT REACH 5.08 IN

CERTIFIED TO NFPA 1936-2020 YES

NFPA CUT TEST A8, B9, C9, D9, E9, F5

IP RATING 54



ESLC-29-20V 9AH

WEIGHT (INCL. BATTERY)
54.60 LBS



ESLC-29-18V LXT-6AH

WEIGHT (INCL. BATTERY)
52.90 LBS



STORM SURGE



ESLC-30-18V

LENGTH 31.50 IN
 HEIGHT 11.69 IN
 WIDTH 10.5 IN
 WEIGHT EXCL. BATTERY 50.70 LBS
 WEIGHT INCL. BATTERY (MILWAUKEE M18)
 53.10 LBS
 MAX. BLADE OPENING 8.25 IN
 MAX. CUT REACH 5.25 IN
 CERTIFIED TO NFPA 1936-2020 YES
 NFPA CUT TEST A8, B9, C9, D9, E9, F5
 IP RATING 54



ESLC-30 20V-9AH

WEIGHT (INCL. BATTERY)
 53.90 LBS



ESLC-30 18V LXT-6AH

WEIGHT (INCL. BATTERY)
 52.20 LBS



STORM SURGE

EBFC-320-18V

LENGTH 35.81 IN

HEIGHT 11.81 IN

WIDTH 10.5 IN

WEIGHT EXCL. BATTERY 61.50LBS

WEIGHT INCL. BATTERY (MILWAUKEE M18)
63.90 LBS

MAX. BLADE OPENING 8.60 IN

MAX. CUT REACH 5.55 IN

CERTIFIED TO NFPA 1936-2020 YES

NFPA CUT TEST A9, B9, C9, D9, E9, F6

IP RATING 54



EBFC-320
20V-9AH

WEIGHT (INCL. BATTERY)
64.75 LBS



EBFC-320
18V LXT-6AH

WEIGHT (INCL. BATTERY)
63.05 LBS



STORM
SURGE

FIRE & SAFETY

EQUIPMENT COMPANY



ESLCC-24-18V

LENGTH 31.12 IN

HEIGHT 11.74 IN

WIDTH 10.50 IN

WEIGHT EXCL. BATTERY 39.80LBS

WEIGHT INCL. BATTERY (MILWAUKEE M18)
42.20 LBS

MAX. BLADE OPENING 9.12 IN

MAX. CUT REACH 3 IN

MAX. SPREAD DIST. 12.00 IN

MAX. SPREAD FORCE RANGE

11,880 - 121,000 LBF

CERTIFIED TO NFPA 1936-2020 YES

NFPA CUT TEST A6, B5, C7, D7, E6

IP RATING 54



ESLCC-24 20V-9AH

WEIGHT (INCL. BATTERY)
43.00 LBS



ESLCC-24 18V LXT-6AH

WEIGHT (INCL. BATTERY)
41.30 LBS



STORM SURGE

11

6



FIRE & SAFETY

EQUIPMENT COMPANY



EBFCC-28-18V

LENGTH 36.21 IN

HEIGHT 11.74 IN

WIDTH 10.50 IN

WEIGHT EXCL. BATTERY 52.75LBS

WEIGHT INCL. BATTERY (MILWAUKEE M18)
55.08 LBS

MAX. BLADE OPENING 10.12 IN

MAX. CUT REACH 5.55 IN

MAX. SPREAD DIST. 17.00 IN

MAX. SPREAD FORCE RANGE

286,000 LBF

CERTIFIED TO NFPA 1936-2020 YES

NFPA CUT TEST A8, B7, C8, D8, E9, F5

IP RATING 54



EBFCC-28 20V-9AH

WEIGHT (INCL. BATTERY)
55.95 LBS



EBFCC-28 18V LXT-6AH

WEIGHT (INCL. BATTERY)
54.25 LBS



STORM SURGE



7

ES100-24-18V

LENGTH 32.43 IN

HEIGHT 11.15 IN

WIDTH 13.58 IN

WEIGHT EXCL. BATTERY 46.85 LBS

INCL. BATTERY (MILWAUKEE M18)
49.20 LBS

MAX. SPREAD DISTANCE 23.50 IN

MAX. SPREAD FORCE RANGE

64,476 - 242,368 LBF

MAX. PULL DIST. 14.25 IN

MAX. PULL FORCE 14,368 LBF

CERTIFIED TO NFPA 1936-2020 YES

IP RATING 54



ES100-24 20V-9AH

WEIGHT (INCL. BATTERY)
50.05 LBS



ES100-24 18V LXT-6AH

WEIGHT (INCL. BATTERY)
48.35 LBS



STORM SURGE

ES100-28-18V

LENGTH 34.80 IN

HEIGHT 11.15 IN

WIDTH 13.58 IN

WEIGHT

EXCL. BATTERY 48.20 LBS

INCL. BATTERY (MILWAUKEE M18)
50.55 LBS

MAX. SPREAD DISTANCE 27.50 IN

MAX. SPREAD FORCE RANGE

56,128 - 228,126 LBF

MAX. PULL DISTANCE 18.25 IN

MAX. PULL FORCE 11,168 LBF

CERTIFIED TO NFPA 1936-2020 YES

IP RATING 54



ES100-28 20V-9AH

WEIGHT (INCL. BATTERY)

51.40 LBS



ES100-28 18V LXT-6AH

WEIGHT (INCL. BATTERY)

48.35 LBS



STORM SURGE



ES100-32-18V

LENGTH 37.17 IN

HEIGHT 11.15 IN

WIDTH 13.58 IN

WEIGHT

EXCL. BATTERY 49.45 LBS

INCL. BATTERY (MILWAUKEE M18)
51.80 LBS

MAX. SPREAD DISTANCE 31.50 IN

MAX. SPREAD FORCE RANGE

50,592 - 201,420 LBF

MAX. PULL DISTANCE 22.25 IN

MAX. PULL FORCE 9,339 LBF

CERTIFIED TO NFPA 1936-2020 YES

IP RATING 54



ES100-28
20V-9AH

WEIGHT (INCL. BATTERY)

52.65 LBS



ES100-28

18V LXT-6AH

WEIGHT (INCL. BATTERY)

50.95 LBS



STORM
SURGE

ER-40-18V



CLOSED LENGTH 25.50 IN
EXTENDED LENGTH 41.00 IN
HEIGHT 10.75 IN
WIDTH 8.10 IN
WEIGHT
EXCL. BATTERY 41.25 LBS
INCL. BATTERY (MILWAUKEE M18)
 43.60 LBS
MAX. PUSH FORCE 37,005 LBF
MAX. PULL FORCE 8,293 LBF
CERTIFIED TO NFPA 1936-2020 YES
IP RATING 54



ER-40 20V-9AH

WEIGHT (INCL. BATTERY)
 44.45 LBS



ER-40 18V LXT-6AH

WEIGHT (INCL. BATTERY)
 42.75 LBS



STORM SURGE

FIRE & SAFETY

EQUIPMENT COMPANY



ETLS-40-18V

CLOSED LENGTH 21.50 IN
 EXTENDED LENGTH 42.25 IN
 HEIGHT 10.75 IN
 WIDTH 8.10 IN
 WEIGHT
 EXCL. BATTERY 38.75 LBS
 INCL. BATTERY (MILWAUKEE M18)
 41.10 LBS
 1ST STAGE STROKE 12.95 IN
 1ST STAGE MAX. PUSH FORCE 38.067 LBF
 2ND STAGE STROKE 8.70 IN
 2ND STAGE MAX. PUSH FORCE 13.088 LBF
 CERTIFIED TO NFPA 1936-2020 YES
 IP RATING 54



ETLS-40 20V-9AH

WEIGHT (INCL. BATTERY)
 41.95 LBS



ETLS-40 18V LXT-6AH

WEIGHT (INCL. BATTERY)
 40.25 LBS



STORM SURGE

12



**STORM
SURGE**



RAM BASE EXTENSION - *KIT*

6 INCH RAM BASE EXTENSION

ASSEMBLED LENGTH 10.35 IN

MAXIMUM EXTENDED LENGTH

ER-40 WITH EXTENSION 48.75 IN

ETLS-40 WITH EXTENSION 50.00 IN

12 INCH RAM BASE EXTENSION

ASSEMBLED LENGTH 16.35 IN

MAXIMUM EXTENDED LENGTH

ER-40 WITH EXTENSION 54.75 IN

ETLS-40 WITH EXTENSION 56.00 IN

18 INCH RAM BASE EXTENSION

ASSEMBLED LENGTH 22.35 IN

MAXIMUM EXTENDED LENGTH

ER-40 WITH EXTENSION 60.75 IN

ETLS-40 WITH EXTENSION 62.00 IN





R - KIT



XR - KIT



570220 - M18 - 8AH

**57074 - M18 PACKOUT
6 BAY
RAPID CHARGER**



**57074 - M18 DUAL BAY
SIMULTANEOUS
SUPER CHARGER**



**570221 - M18 DUAL
RAPID CHARGER**



570222 - 20V/60V - 9AH



**570223 - DCB118 SINGLE
FAST CHARGER**



570225 - 18V - 6AH



**570226 - DC18RD DUAL
RAPID CHARGER**





ISO 9001-2015

The International for Standardization (ISO) is a network of national standards instituted in 157 countries. Each ISO member is the leading standards organization in its country. These members devise new standards, work to advance them, and team up with the ISO Central Secretariat to guide the technical groups that develop them.

They award certification only after registered, independent auditors review a company's process against strict ISO standards, and verify that the company has met established requirements, in both policy and practice.


TNT Rescue Systems Inc. is certified as an ISO 9001:2015 registered firm. This means you can be sure that TNT Rescue Systems Inc. products are designed and manufactured to the high standards our industry - and the ISO - demands. Certification covers all that we do to enhance customer satisfaction by meeting both customer and regulatory requirements, while continually improving performance.

PERFORMANCE,
QUALITY
AND SERVICE
GUARANTEED!





CUSTOMIZE. TRACK. MANAGE.

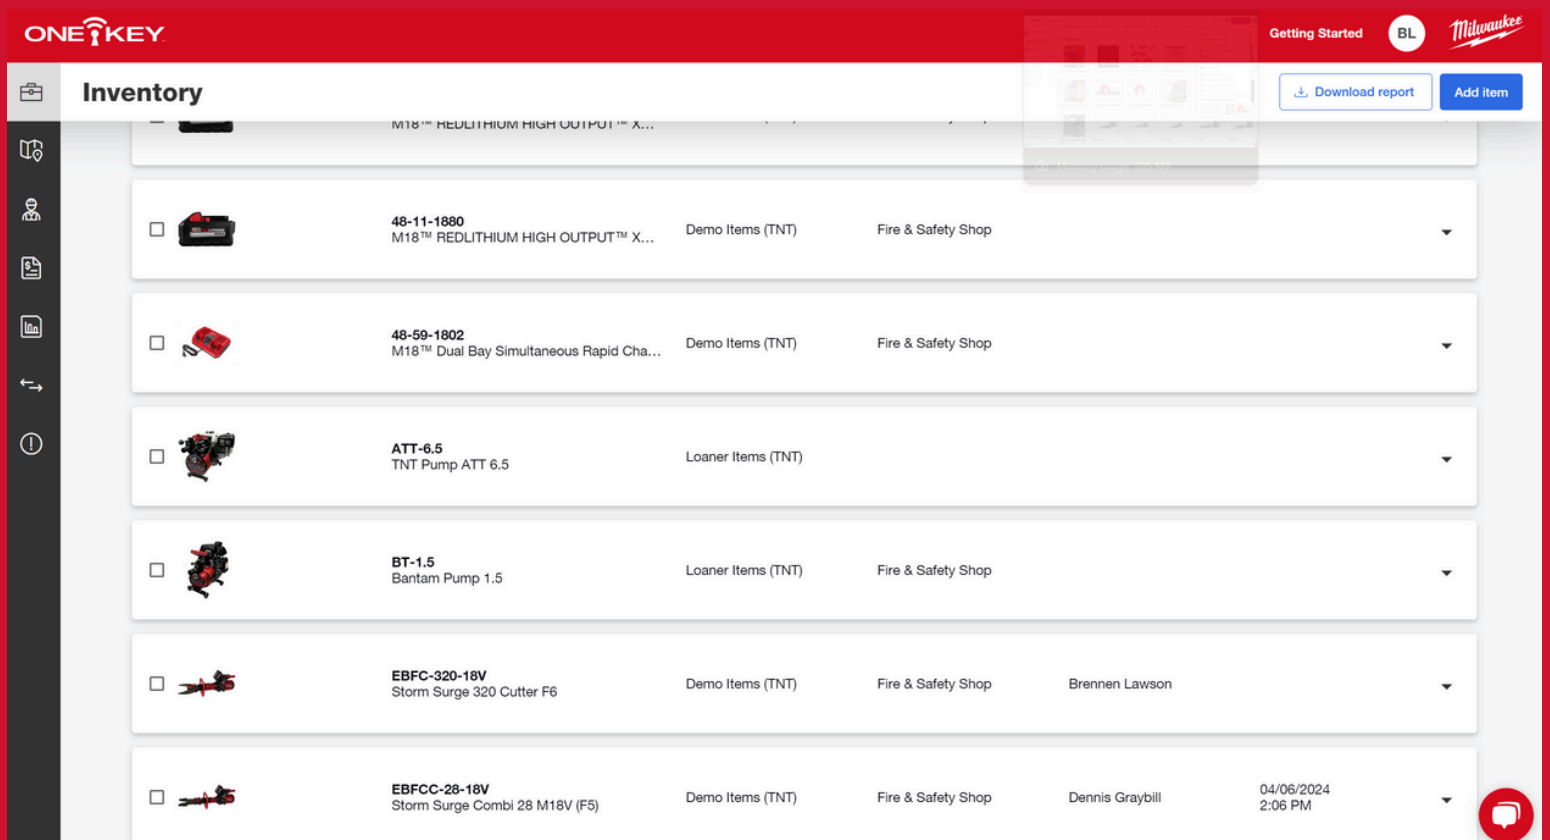

*FREE Inventory
Management & Tracking
System*



16



CUSTOMIZE. TRACK. MANAGE.

The screenshot displays the Milwaukee ONE KEY web application's inventory management interface. The top navigation bar includes the ONE KEY logo, a "Getting Started" link, a user profile icon labeled "BL", and the Milwaukee logo. The main header is "Inventory", with a "Download report" link and an "Add item" button. The left sidebar contains icons for various functions like home, inventory, users, and reports. The main content area shows details for a specific tool: a Storm Surge Combi 28 M18V (F5) with model # EBFCC-28-18V, serial # 1667, barcode # 10015IBS, and tracker serial # BAAAJT3Y. It indicates the item was added 6 days ago and provides an "Add value" button. The tool's status is "Available". Under "Assignments", it lists "Fire & Safety Shop", "Dennis Graybill", and "Sales". The "Service" section shows a service date of 12/1/24, 0 service records, 0 uploads, and a total service cost of \$0.00. The "Tool history" table shows two entries: one on 04/03/2024 at 4:23 pm at the Fire & Safety Shop (Available, 3 days) and another on 03/31/2024 at 3:34 pm (Available, 3 days). A map on the right shows the location of the Fire & Safety Equipment Company at 7854 Stage Rd, Concord, VA 24538, USA, with a location history for today at 2:06 PM.



Set up on delivery!



FOR MORE DETAILED INFORMATION OR TO
SCHEDULE A DEMO PLEASE REACH OUT:

WWW.FIREANDSAFETY.COM



TNT@FIREANDSAFETY.COM



June 2025